

Stringer Grade	Metal Thickness	Base Size	For Voids
Heavy / Extra Heavy	1.6 / 2mm	Suit 600mm Grid	600mm and Over

Stringers

Stringers are used where additional lateral stability is required or where floor heights exceed 600mm. The stringers are attached to the pedestals either via a clip in slot arrangement or screw fixed. Stringers will improve lateral stability and rigidity but will not effect the load bearing performance.

2mm heavy duty stringer, U channel mild steel construction, zinc plated to BS 1706:1990 Fe/Zn 5c2c hook in location with screw down facility.

1.6mm medium duty stringer, U channel mild steel pre galvanised with hook in location with screw down facility

Box stringer and bespoke sectional steels made to customers requirements.

All above can be produced whisker free if required with Nickel Plating.


Manufacture

Bathgate Flooring manufacture within the UK, allowing us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.

Bathgate Flooring Limited

1 Fir Tree Lane
Hereford HR2 6LA
United Kingdom

☎: +44 (0)870 600 2066
☎: +44 (0)1432 347 730
✉: sales@bathgateflooring.co.uk
🌐: www.bathgateflooring.co.uk

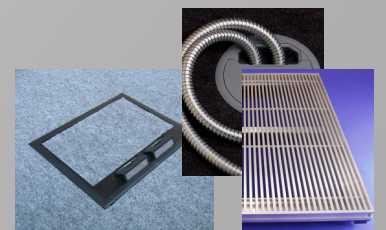

For further information **Call: 0870 600 2066**